
RS1005K-P4-M

L2/3 MANAGED POE SWITCH

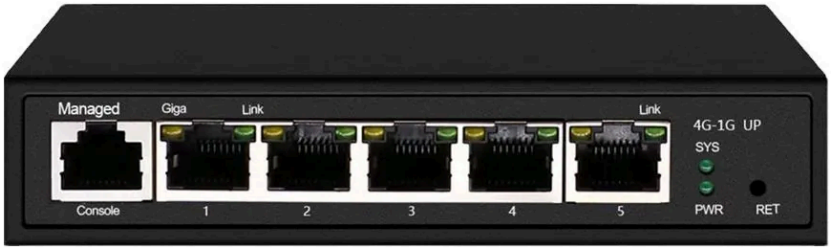

Product Overview

Gigabit PoE switch for network and surveillance applications.

Product Highlights

- IEEE 802.3af/at PoE support

Product name	5-Port Full Gigabit L2+ Managed PoE Switch
Model	RS1005K-P4-M
Fixed Port	4*10/100/1000Base-TX PoE port （Data/Power） 1*10/100/1000Base-TX uplink RJ45 port (Data)
PoE Ports	1-4 port supports IEEE802.3af/at, max 30W/port, PoE out
Console port	1*console port
Reset Key	1
PoE Pin	1 2 + 3 6 -
PoE Bridge	max 65W
CPU	500MHz
DDR	1G DDR3
FLASH	16MBytes
RAM	128MBytes
Bandwidth	20Gbps
Packet Forwarding	14.88Mpps

MAC	8K
Buffer	4.1 Mbit SRAM Packet Buffer
Jumbo Frame	10000Bytes
VLAN Address	4K
Transmission Distance	10BASE-T： Cat3,4,5 UTP(≤250 meter) 100BASE-TX： Cat5 or later UTP(150 meter) 1000BASE-TX： Cat6 or later UTP(150 meter)
LED Indicator	PWR:Power LED； SYS:System LED； Uplink :Green LED=10/100M Link、 Orange=Gigabit Link Port:Orange=PoE LED, Green=LAN Link LED
Power	External power DC： 52V 1.25A max 71W(100-240Vac 50/60Hz 0.9A)
Operating Temperature/Humidity	-10 ～ +55°C； 5% ～ 90% RH Non coagulation
Storage Temperature/Humidity	-40 ～ +75°C； 5% ～ 95% RH Non coagulation
Product /Packing size （L*W*H）	125mm*105mm*28mm 205mm*135mm*95mm
N.W/G.W （kg）	0.4kg/0.9kg
Lightning Protection level	6KV 8/20us； IP30
Installation	Desktop