
RS1006-AI-G

POE SWITCH

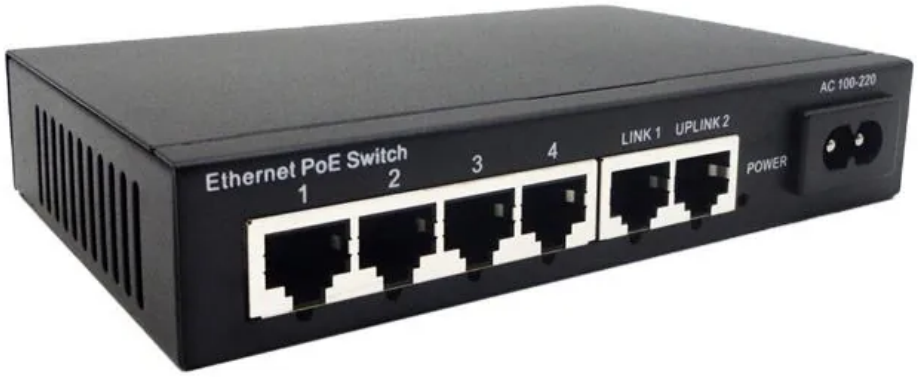

Product Overview

Mini PoE switch 48V with 6 self-negotiated 10/100Mbps RJ45 ports. 4 x PoE ports (IEEE 802.3af/at), 2 x uplink. 60W power supply (max 72W). 1.6G exchange capacity. Mode A PoE pinout. CE/FCC.

Product Highlights

- 6 x 10/100Mbps self-negotiated RJ45
- 4 x PoE ports (IEEE 802.3af/at)
- 2 x uplink ports
- 60W power supply (max 72W)
- 1.6 Gbps exchange capacity
- 15.4W / 30W per PoE port
- Mode A PoE: 1/2 positive, 3/6 negative
- CE / FCC certified

Product Name	6 Port 10/100Mbps mini POE switch 60W
Model	RS1006-AI-G
PORTS	6*10/100Mbps RJ45
Standards	IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3af, IEEE802.3at
Network media (cable)	10BASE-T: Category 3, 4, 5 UTP, Max Distance ≤ 100m 100BASE-TX: Category 5 and above UTP, Max Distance ≤ 100m
MAC Address Sheet	1K, automatic learning, automatic updating

Transmission mode	Storage forwarding
Backplane bandwidth	1.6 Gbps
Power input	AC 100-240V 50/60Hz
Power supply	External power supply 60W MAX 72W
PoE port	Port 1~4
RJ45 PoE power supply	Mode A: 1/2+, 3/6-
PoE port output	Max 30W per port
Working temperature	0°C ~40°C
Storage temperature	-40°C ~70°C
Working humidity	10%~90% non-condensing
Storage humidity	5%~90% non-condensing
Appearance Size (L*W*H)	178*120*35 mm 182*196*48 mm
Machine weight	Product weight 0.85 Kg, Packing weight 1.2 Kg
Package specification	20 SET W*D*H 485*380*280 mm, 22 Kg